

SUBCONTRACT SCOPE OF WORK AND PLAN OF WORK

Project: 132 kV Underground Cable Link, Sector 7 to Sector 12
Employer: Tarwan Electricity Transmission Co. (fictional)
Main Contractor: Maradel Gulf Contracting W.L.L. (fictional)
Subcontractor: Vexley Trenchless Services (fictional)
Subcontract Ref: MG/SC/2026/017 · **Schedule 1, Rev 0, Approved Programme baseline**
Invented project for a video demonstration. Every party, quantity and date is made up.

1. Scope in one paragraph

Vexley installs the 8.4 km underground duct and cable route from Sector 7 to Sector 12: eight horizontal directional drilling crossings with four 630 mm HDPE ducts each, open-cut trench along the rest of the route, and the pulling, jointing and termination of the 132 kV XLPE cable supplied free issue by Maradel. Time for Completion is 60 calendar days from the Commencement Date, 02 March 2026 (Day 0), so completion falls on 01 May 2026 (Day 60).


2. Deliverables

Ref	Deliverable	Quantity	Method and resource
D-1	HDD crossings, 4 × 630 mm SDR 17 HDPE ducts each, pilot, ream, pullback, pressure test	8 crossings, 1,600 m drilled, 6,400 m of duct	Rig-A 250 t on HDD-03, HDD-06 and HDD-07, Rig-B 100 t on the other five, mud recycling, crane 50 t
D-2	Open-cut trench, bedding sand, cable protection tiles, backfill, reinstatement	6,800 m of trench, 1,800 m³ sand, 8,600 tiles	2 × 20 t excavators, labour
D-3	Cable installation: off-load, store, pull, joint and terminate 132 kV XLPE cable	12 free-issue drums (Schedule 3)	Pulling crew of 8, crane 50 t, winch
D-4	Records: Daily Progress Report by 20:00 each day, as-built survey, test certificates	Daily, and at handover	Site engineer, surveyor

By Maradel, not Vexley (Schedule 2, Division of Responsibility): highway, road and wadi permits, delivered 7 days before each crossing starts (R-2, R-3); third-party land access along the route (R-4); the geotechnical report (R-5); the cable, joints and terminations as free issue (R-6); traffic management at highway crossings (R-9).

3. Cable route layout

Eight blocks in route order, Sector 7 to Sector 12. Not to scale. Short open-cut lengths between adjacent crossings are counted inside the HDD block.

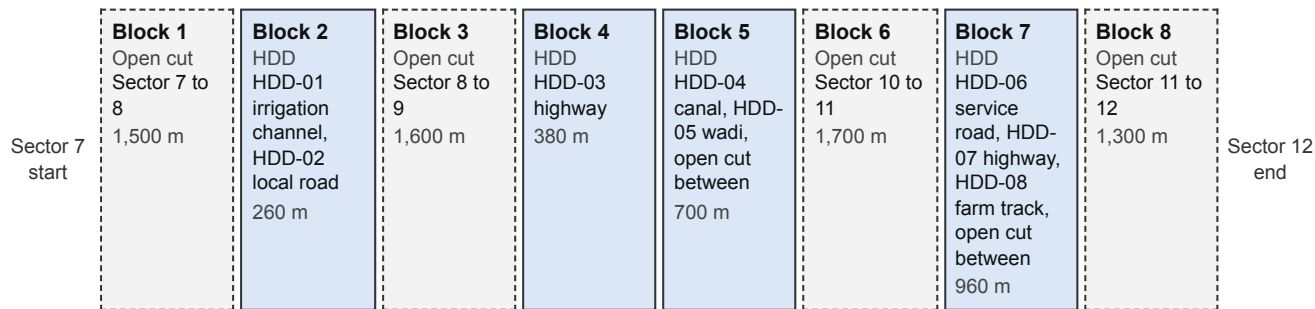

Permits from Maradel: HDD-02, HDD-03, HDD-06 and HDD-07 road or highway (R-2); HDD-05 wadi environmental (R-3). Third-party land on the HDD-06 exit side (R-4). Rig-A takes HDD-03, HDD-06 and HDD-07; Rig-B the other five.

4. Plan of work (Approved Programme, Rev 0)

Day 0 = Commencement Date, 02 March 2026. One row per route block, in route order. Bars are coloured by resource.

No.	Activity	Block	Start	Finish	D0	D5	D10	D15	D20	D25	D30	D35	D40	D45	D50	D55
1	Mobilisation, site offices, survey, setting out	All	Day 0, 02 Mar	Day 3, 05 Mar	■											
2	Open cut, Sector 7 to 8	Block 1	Day 2, 04 Mar	Day 12, 14 Mar		■	■									
3	HDD-01 and HDD-02	Block 2	Day 3, 05 Mar	Day 10, 12 Mar		■	■									
4	Open cut, Sector 8 to 9	Block 3	Day 10, 12 Mar	Day 20, 22 Mar			■	■	■							
5	HDD-03 highway, pits from Day 3, drilling from Day 8	Block 4	Day 3, 05 Mar	Day 16, 18 Mar		■	■	■								
6	HDD-04 and HDD-05, with open cut between	Block 5	Day 11, 13 Mar	Day 29, 31 Mar			■	■	■	■						
7	Open cut, Sector 10 to 11	Block 6	Day 20, 22 Mar	Day 30, 01 Apr					■	■	■					
8	HDD-06, HDD-07, HDD-08, open cut between	Block 7	Day 10, 12 Mar	Day 46, 17 Apr			■	■	■	■	■	■	■	■		
9	Open cut, Sector 11 to 12	Block 8	Day 30, 01 Apr	Day 40, 11 Apr							■	■	■			
10	Cable pull, block by block as ducts and trench complete	All	Day 12, 14 Mar	Day 50, 21 Apr			■	■	■	■	■	■	■	■	■	
11	Joints, terminations, tests, as-builts, handover	All	Day 42, 13 Apr	Day 60, 01 May										■	■	■

■ Rig-A ■ Rig-B ■ Excavator ■ Pulling ■ Jointing ■ Other

Milestones: first drums on site Day 9 (11 Mar) · HDD-06 exit-side access Day 10 (12 Mar) · HDD-03 drilling starts Day 8 (10 Mar) · HDD-07 permit Day 31 (02 Apr) · all crossings complete Day 46 (17 Apr) · joint kits on site Day 46 (17 Apr) · all cable pulled Day 50 (21 Apr) · Completion Day 60 (01 May 2026).

All quantities and dates are invented for the demonstration.